



# Thermoplastic Fabrication Specification Form

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Phone #: \_\_\_\_\_


Date: \_\_\_\_\_  
 PO or Reference #: \_\_\_\_\_

Belt Type: \_\_\_\_\_  
 Belt Length: \_\_\_\_\_  
 Belt Color: \_\_\_\_\_  
 Splice Style: \_\_\_\_\_

- A. \_\_\_\_\_ Belt Width
- B. \_\_\_\_\_ Indent
- C. \_\_\_\_\_ Sidewall Height
- D. \_\_\_\_\_ Clear Width
- E. \_\_\_\_\_ Cleat Height
- F. \_\_\_\_\_ Cleat Style
- G. \_\_\_\_\_ Cleat Spacing
- H. \_\_\_\_\_ Compound
- I. \_\_\_\_\_ Min. Pulley Dia.

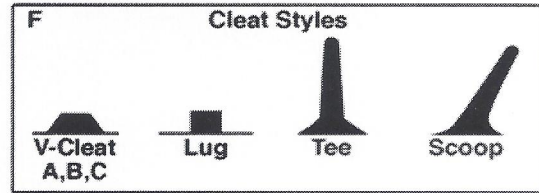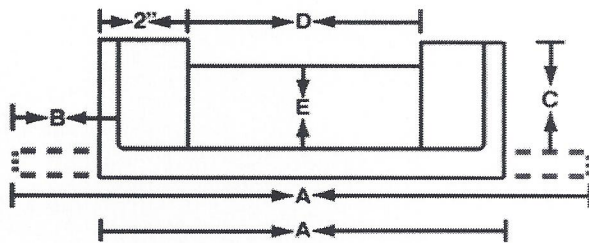

Special Instructions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

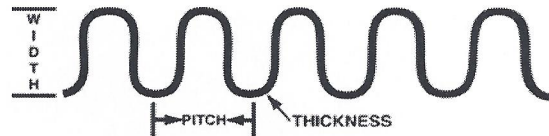

### Weldwall Specifications

	RAV	Urethane
Compound Color	White or Black	Clear
Thickness	.187 (3/16")	.187 (3/16")
Corrugation Pitch	2"	2"
Corrugation Width	2"	2"
Reinforcement	50 lb. Spun Polyester	None
Height	1" to 3"	1" to 3"
Base (if Loose)	2"	2"
Minimum Pulley	4" - 9"	4" - 9"
	(depending on Weldwall™ height)	